





Cleveland Controls

Division of UniControl Inc.


Standard Sample Line Connectors





$\frac{7}{16}$ - 24 UNS external thread for compression nut and ferrule.





$\frac{1}{8}$ - 27 NPT internal thread for pipe connection.

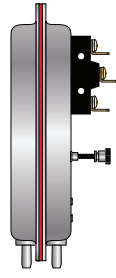

$\frac{1}{4}$ " OD smooth, suitable for flexible plastic tubing.


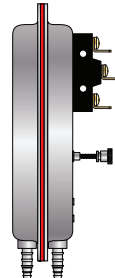


$\frac{3}{16}$ " or $\frac{1}{4}$ " OD dual-barbed, suitable for flexible plastic tubing.


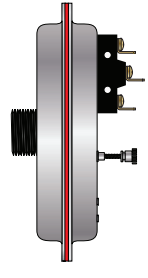


1 - 14 UNS external thread combined with $\frac{1}{4}$ - 18 NPT internal thread.



1. Standard sample line connectors for Series AFS, ANA, DFS and DDP sensing switches.




$\frac{7}{16}$ - 24 UNS external thread for compression nut and ferrule,
or
 $\frac{7}{16}$ - 20 UNF external thread for compression nut and ferrule.



$\frac{1}{8}$ - 27 NPT internal thread for pipe connection



$\frac{1}{4}$ " OD smooth, suitable for flexible plastic tubing.



$\frac{3}{16}$ ", $\frac{1}{4}$ " or $\frac{5}{16}$ " ID tri-barbed, suitable for flexible plastic tubing.

2. Standard sample line connectors for Series RFS sensing switches.



Cleveland Controls
DIVISION OF UNICONTROL INC.
1111 Brookpark Rd
Cleveland OH 44109


Tel: 216-398-0330

Fax: 216-398-8558



Email: salesvac@unicontrolinc.com

Web page: <http://www.clevelandcontrols.com>



Are you reading a FAX or a COPY of this bulletin? DOWNLOAD the full-color PDF version of this and other literature at our website!

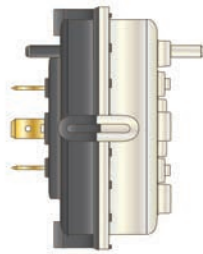


*1/8" OD surface fitting
suitable for flexible
plastic tubing.*

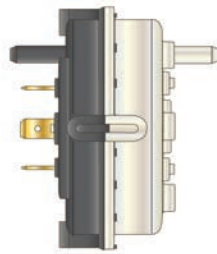

*1/4" OD surface fitting
suitable for flexible
plastic tubing.*

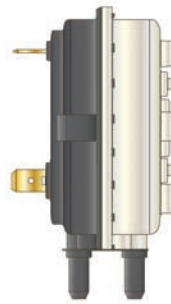


*1/4" OD side fitting
suitable for flexible
plastic tubing.*




*7/16 - 20 UNS side fitting
with external thread for
compression nut and
ferrule.*



3. Standard sample line connectors for Series NS2 sensing switches.

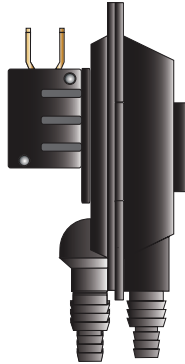

*1/4" or 3/8" ID
dual-barbed,
suitable for
flexible plastic tubing.*

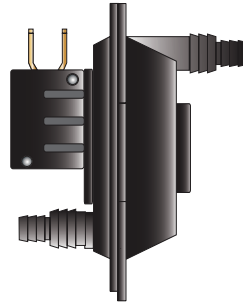

*1/4" or 3/8" ID
dual-barbed,
suitable for
flexible plastic tubing.*

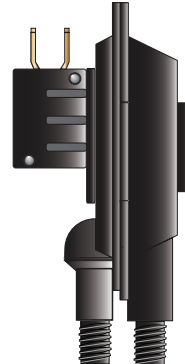

*3/8 - 24 UNF
external thread
for compression
nut and ferrule.*

4. Standard sample line connectors for Series RSS sensing switches.